

1ST		SPUR		2ND	
<input checked="" type="checkbox"/> 48T	<input type="checkbox"/> 49T	<input type="checkbox"/> 50T	<input type="checkbox"/> 44T	<input checked="" type="checkbox"/> 45T	<input type="checkbox"/> 46T

1ST		PINION		2ND	
<input type="checkbox"/> 15T	<input checked="" type="checkbox"/> 16T	<input type="checkbox"/> 17T	<input type="checkbox"/> 18T	<input checked="" type="checkbox"/> 19T	<input type="checkbox"/> 20T

CENTAX	
CLUTCHBELL	ALU <input type="checkbox"/> STEEL <input type="checkbox"/>
CLUTCHSHOE	BLACK <input type="checkbox"/> YELLOW <input type="checkbox"/> RED <input type="checkbox"/>


FRONT		REAR	
SHOCK ABSORBERS			
OIL 1000 CST	<input type="radio"/> OPEN	OIL 1000 CST	<input type="radio"/> OPEN
SPRING PURPLE	<input type="radio"/> CLOSED	SPRING RED	<input type="radio"/> CLOSED

ANTI-ROLL BARS		WIRE 2.5 Ø	
<input checked="" type="checkbox"/> 0°	<input type="checkbox"/> 30°	<input type="checkbox"/> 0°	<input type="checkbox"/> 30°
<input type="checkbox"/> 45°	<input type="checkbox"/> 60°	<input type="checkbox"/> 45°	<input type="checkbox"/> 60°
<input type="checkbox"/> 90°	<input type="checkbox"/> 90°	<input type="checkbox"/> 90°	<input type="checkbox"/> 90°

LEFT	RIGHT	TYRES	LEFT	RIGHT
		MAKE		
35°	35°	SHORE	35°	35°
68 mm	68 mm	DIAMETER	75 mm	75 mm
		5-MIN WEAR		

ENGINE	VERSION	HEADSHIMS	mm
		CARB DIA	mm
EXHAUST			
FUEL			%

BODY TYPE: PROTO-FORM 909
BUMPER HOLES CUT: YES <input type="checkbox"/> NO <input type="checkbox"/>

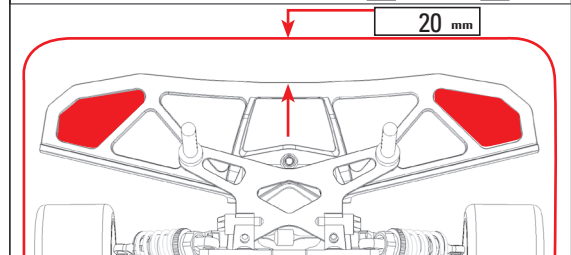

STIFFENERS	
RIGHT SIDEPLATE: YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>	
CARBON YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>	
LEFT SIDEPLATE: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	

REMARKS

RACE	DATE
TRACK	RESULT
SURFACE: <input type="checkbox"/> ASPHALT <input type="checkbox"/> OTHER SPECIFY	QUALIFYING POSITION
LAYOUT: <input type="checkbox"/> TECHNICAL <input type="checkbox"/> MIXED <input type="checkbox"/> FAST	QUALIFYING TIME
TRACTION: <input type="checkbox"/> LOW <input type="checkbox"/> MEDIUM <input type="checkbox"/> HIGH	FINAL POSITION
TRACK TEMP	AIR TEMP

FRONT	REAR
STEERING BLOCK L 2 R 1	BODY MOUNT-POSITION
OFFSET 1,5 mm	UPRIGHT SHIMS 2 mm
UPPER ARM-POSITION	UPRIGHT TYPE REGULAR <input checked="" type="checkbox"/> WOS <input type="checkbox"/>
SHOCK-POSITION	BODY MOUNT-POSITION
DOWNSTOP 1 mm	SHOCK-POSITION
ROLL CENTER INSERTS FRONT REAR	DOWNSTOP 8 mm

CAMBER	FRONT	REAR
R -1,5° L -1,5°	R -2° L -2°	
BRACKET TYPE TE <input checked="" type="checkbox"/> 966 IN <input checked="" type="checkbox"/> OUT <input type="checkbox"/>		
RIDE-HEIGHT 7 mm	ANTI-ROLL BAR-POSITION	RIDE-HEIGHT 8 mm

TOE-IN	FRONT	REAR
-1°	BRACKET TYPE TE <input checked="" type="checkbox"/> 966	CONNECTOR TYPE NONE <input type="checkbox"/> RUBBER <input checked="" type="checkbox"/> ALU <input type="checkbox"/>
WHEELBASE 0 <input type="checkbox"/> -1 <input type="checkbox"/> -2 <input checked="" type="checkbox"/> -3 <input type="checkbox"/> -4 <input type="checkbox"/>	SHIMS FRONT 3 mm REAR 3 mm	
CASTER SPACERS 6 mm	PULLEY 24 <input type="checkbox"/> 25 <input checked="" type="checkbox"/>	WHEELBASE 0 <input type="checkbox"/> -1 <input type="checkbox"/> -2 <input checked="" type="checkbox"/> -3 <input type="checkbox"/>
FLEX YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>		TOE-IN 2°

FRONT	BACK
TRACK WIDTH 254 mm	TRACK WIDTH 264 mm