

1ST		SPUR		2ND	
☒ 48T	☐ 49T	☐ 50T	☐ 44T	☒ 45T	☐ 46T

1ST		PINION		2ND	
☒ 15T	☐ 16T	☐ 17T	☐ 18T	☒ 19T	☐ 20T

CENTAX	
CLUTCHBELL	ALU ☒ STEEL ☐
CLUTCHSHOE	BLACK ☒ YELLOW ☐ RED ☐

FRONT		REAR	
SHOCK ABSORBERS			
OIL 600 CST	☐ OPEN ☒ CLOSED	OIL 800 CST	☐ OPEN ☒ CLOSED
SPRING blue		SPRING pink	


ANTI-ROLL BARS		WIRE 2.3 Ø	
☒ 0°	☐ 30°	☐ 0°	☐ 30°
☐ 45°	☐ 60°	☐ 45°	☐ 60°
☐ 90°	☐ 90°	☐ 90°	☐ 90°

LEFT	RIGHT	TYRES	LEFT	RIGHT
		MAKE		
32°	32°	SHORE	35°	35°
67 mm	67 mm	DIAMETER	74 mm	74 mm
mm	mm	5-MIN WEAR	mm	mm

ENGINE	Xceed ZX 21		
VERSION	DS 5	HEADSHIMS	0.4 mm
GLOWPLUG	7 cold	CARB DIA	8 mm

EXHAUST	2069		
FUEL	Xceed		25 %

BODY TYPE:	Xceed Lola		
BUMPER HOLES CUT:	YES ☐	NO ☒	

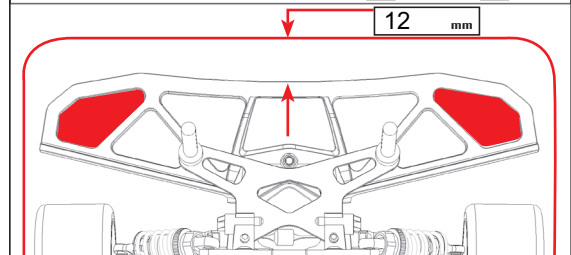

STIFFENERS	
RIGHT SIDEPLATE: YES ☐ NO ☒	
CARBON YES ☐ NO ☒	
LEFT SIDEPLATE: YES ☐ NO ☒	

REMARKS
optional alu servosaver. position "0"

RACE	Michael Salven West 1/8	DATE	
TRACK	Oberhausen	RESULT	
SURFACE:	☒ ASPHALT ☐ OTHER SPECIFY	QUALIFYING POSITION	
LAYOUT:	☒ TECHNICAL ☐ MIXED ☐ FAST	QUALIFYING TIME	
TRACTION:	☐ LOW ☒ MEDIUM ☐ HIGH	FINAL POSITION	
TRACK TEMP		AIR TEMP	

FRONT		REAR	
STEERING BLOCK L ☒ R ☐	SHOCK-POSITION	BODY MOUNT-POSITION	UPRIGHT SHIMS 4 mm
OFFSET 2.5 mm	UPPER ARM-POSITION	UPRIGHT TYPE REGULAR ☒ WOS ☐	
DOWNSTOP 0 mm		SHOCK-POSITION	DOWNSTOP 7 mm
ROLL CENTER INSERTS FRONT ☐ REAR ☒			

CAMBER		RIDE-HEIGHT	
R -1.5°	L -1.5°	7 mm	9 mm
BRACKET TYPE TE ☒ 966 IN ☐ OUT ☐			
ANTI-ROLL BAR-POSITION			

BRACKET TYPE TE ☒ 966	CONNECTOR TYPE NONE ☐ RUBBER ☒ ALU ☐
SHIMS FRONT 2 mm REAR 2 mm	
TOE-IN 0°	WHEELBASE 0 ☐ -1 ☐ -2 ☒ -3 ☐ -4 ☐
CASTER SPACERS 5 mm	TOE-IN 2.0°
PULLEY 24 ☐ 25 ☒	
FLEX YES ☐ NO ☒	

ACKERMANN	
FRONT	BACK
TRACK WIDTH 253 mm	TRACK WIDTH 264 mm