
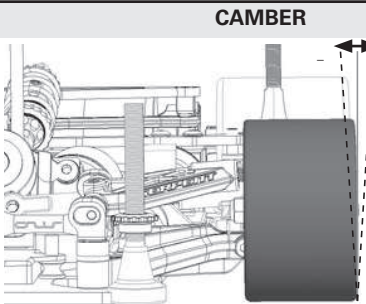


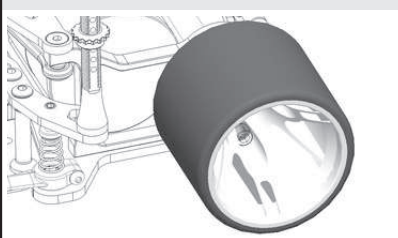








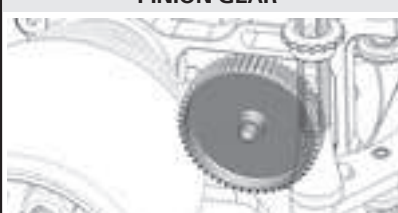





SET UP



NAME Nacho López		RACE	DATE	SURFACE Asphalt	
FRONT SPRING 18 / 0.45 <input type="checkbox"/> 22 / 0.50 <input checked="" type="checkbox"/> 26 / 0.55 <input type="checkbox"/>				CAMBER  <div style="display: flex; justify-content: space-between;"> <div>L 0.5 °</div> <div>R 1 °</div> </div>	FRONT TIRES  <p> Brand Matrix Hardness 35 Diameter 43 Additive Paragon FX12 Additive time 30min Treated surface 50% </p>
FRONT SUSPENSION BRACKET 0 <input type="checkbox"/> 3 <input type="checkbox"/> 6 <input type="checkbox"/> 9 <input checked="" type="checkbox"/>				REAR TIRES  <p> Brand Matrix Hardness 35 Diameter 45 Additive Paragon Fx12 Additive time 40 min Treated surface 100% </p>	
RIDE HEIGHT SPACER 0.5 <input type="checkbox"/> 1.0 <input checked="" type="checkbox"/> 2.0 <input type="checkbox"/>					
SUSPENSION INSERT Narrow <input type="checkbox"/> Mid <input checked="" type="checkbox"/> Wide <input type="checkbox"/>					
CASTER SPACERS All in front <input type="checkbox"/> Medium <input checked="" type="checkbox"/> All in back <input type="checkbox"/>				SPUR GEAR  <p> Pitch 64 Teeth 96 </p>	
UPPER ARM INSERTS Inside <input type="checkbox"/> Outside <input checked="" type="checkbox"/>					
CENTER SPRING 10 <input type="checkbox"/> 16 <input checked="" type="checkbox"/> 12 <input type="checkbox"/> 18 <input type="checkbox"/> 14 <input type="checkbox"/>					
SHOCK OIL 600		PISTON  		PINION GEAR  <p> Pitch 64 Teeth 23 </p>	
SIDE SPRING 4.5 <input type="checkbox"/> 6.0 <input type="checkbox"/> 5.0 <input type="checkbox"/> 6.5 <input type="checkbox"/> 5.5 <input checked="" type="checkbox"/> 7.0 <input type="checkbox"/>					
TUBE OIL 10.000 CST.					
AXLE INSERT 0 <input type="checkbox"/> 2.5 <input checked="" type="checkbox"/> 0.5 <input type="checkbox"/> 3 <input type="checkbox"/> 1.0 <input type="checkbox"/> 3.5 <input type="checkbox"/> 1.5 <input type="checkbox"/> 4 <input type="checkbox"/> 2 <input type="checkbox"/>				ROLL OUT 	
BODY Brand / Type PF / AMR		BATTERY Brand LRP Type/Cap. 5800 65C			
REMARKS Track with very low grip and bumpy Front rigid cross brace tube		BATTERY POSITION Left <input type="checkbox"/> Right <input checked="" type="checkbox"/>			
MOTOR Brand NOSRAM Turns 5.5 Timing Standard					
ESC Brand LRP Type SXX Setting 1,6,10,1					