

1ST		SPUR		2ND	
☐ 48T	☒ 49T	☐ 50T	☐ 44T	☐ 45T	☒ 46T

1ST		PINION		2ND	
☐ 15T	☒ 16T	☐ 17T	☐ 18T	☐ 19T	☒ 20T

CENTAX	
CLUTCHBELL	ALU ☒ STEEL ☐
CLUTCHSHOE	BLACK ☒ YELLOW ☐ RED ☐

FRONT		REAR	
SHOCK ABSORBERS			
OIL	600 CST	OIL	1000 CST
SPRING	Green	SPRING	Pink
☒ OPEN ☐ CLOSED		☒ OPEN ☐ CLOSED	


ANTI-ROLL BARS		WIRE 2.5 Ø	
☒ 0°	☐ 30°	☐ 45°	☐ 60°
☐ 0°	☐ 30°	☐ 45°	☐ 60°
☐ 0°	☐ 30°	☐ 45°	☐ 60°
☐ 0°	☐ 30°	☐ 45°	☐ 60°

LEFT	RIGHT	TYRES	LEFT	RIGHT
Matrix	Matrix	MAKE	Matrix	Matrix
30°	32°	SHORE	35°	35°
68 mm	68 mm	DIAMETER	75 mm	75 mm
mm	mm	5-MIN WEAR	mm	mm

ENGINE	Max Power		
VERSION	TQ9 r	HEADSHIMS	0.6 mm
GLOWPLUG	OS RP7	CARB DIA	mm

EXHAUST	Max power		
FUEL	25 %		

BODY TYPE:	PF R18 light weight		
BUMPER HOLES CUT:	YES ☒	NO ☐	

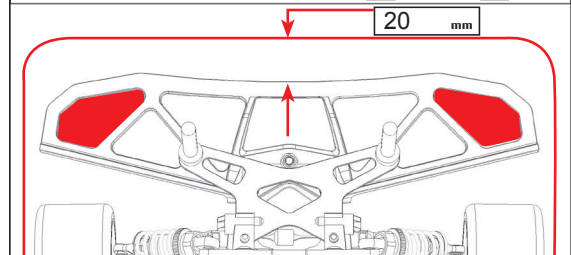

STIFFENERS	
RIGHT SIDEPLATE:	YES ☐ NO ☒
CARBON	YES ☐ NO ☒
LEFT SIDEPLATE:	YES ☒ NO ☐

REMARKS

wheelaxle low in steeringblock.
trackrod underneath steeringblock arms
#903293 Balance weight central brass 50g + 20 g

RACE	European Championship	DATE	
TRACK	Vila Real Portugal	RESULT	
SURFACE:	☒ ASPHALT ☐ OTHER SPECIFY	QUALIFYING POSITION	
LAYOUT:	☐ TECHNICAL ☐ MIXED ☒ FAST	QUALIFYING TIME	
TRACTION:	☐ LOW ☒ MEDIUM ☐ HIGH	FINAL POSITION	
TRACK TEMP		AIR TEMP	

FRONT		REAR	
STEERING BLOCK L 2 R 1	SHOCK-POSITION	BODY MOUNT-POSITION	UPRIGHT SHIMS 2 mm
OFFSET 1.6 mm	UPPER ARM-POSITION	UPRIGHT TYPE REGULAR ☒ WOS ☐	BODY MOUNT-POSITION
	DOWNSTOP 1 mm	SHOCK-POSITION	DOWNSTOP 6 mm
ROLL CENTER INSERTS		ROLL CENTER INSERTS	
FRONT ☐ REAR ☒		FRONT ☐ REAR ☒	

CAMBER		CAMBER	
R 0° L 0°	R 0° L 0°	R 0° L 0°	R 0° L 0°
BRACKET TYPE TE ☒ 966	BRACKET TYPE TE ☒ 966	BRACKET TYPE TE ☒ 966	BRACKET TYPE TE ☒ 966
IN ☐ OUT ☐	IN ☐ OUT ☐	IN ☐ OUT ☐	IN ☐ OUT ☐
RIDE-HEIGHT 7 mm	RIDE-HEIGHT 8 mm	RIDE-HEIGHT 7 mm	RIDE-HEIGHT 8 mm

BRACKET TYPE TE ☒ 966	BRACKET TYPE TE ☒ 966	CONNECTOR TYPE NONE ☐ RUBBER ☐ ALU ☒
SHIMS FRONT 3 mm REAR 3 mm	SHIMS FRONT 3 mm REAR 3 mm	SHIMS FRONT 3 mm REAR 3 mm
TOE-IN 1°	TOE-IN 1.5°	TOE-IN 1.5°
WHEELBASE 0 ☐ -1 ☐ -2 ☒ -3 ☐ -4 ☐	WHEELBASE 0 ☐ -1 ☐ -2 ☐ -3 ☒	WHEELBASE 0 ☐ -1 ☐ -2 ☐ -3 ☒
CASTER SPACERS 6 mm	CASTER SPACERS 6 mm	CASTER SPACERS 6 mm
PULLEY 24 ☐ 25 ☒	PULLEY 24 ☐ 25 ☒	PULLEY 24 ☐ 25 ☒
FLEX YES ☐ NO ☒	FLEX YES ☐ NO ☒	FLEX YES ☐ NO ☒

FRONT		BACK	
ACKERMANN		ACKERMANN	
TRACK WIDTH 252 mm		TRACK WIDTH 265 mm	