



# COBBLE SET UP

## DIFFERENTIAL OIL

FRONT	CENTER	REAR
7000 CST	7000 CST	5000 CST

## CLUTCH

TYPE: STANDARD ☐ OPTIONAL ☐ buku 3 shoe

SHOE: ALU ☐ PCS ☐ SPRING ☐

CARBON ☐ PCS ☐ SPRING ☐

## GEARING

CLUTCH BELL 13 T SPUR GEAR 50 T

## BRAKE BALANCERS

50/50 ☐ BALANCER CLIPS: 0.5 MM ☐ pcs

OPTION ☐ 0.75MM ☐ pcs

1.0 MM ☐ pcs

1.25MM ☐ pcs

1.5 MM ☐ pcs

## SHOCKS

FRONT	SPRING	REAR
C= 4.8 <input type="checkbox"/>	PINK <input type="checkbox"/>	C= 2.8 <input type="checkbox"/>
C= 5.0 <input type="checkbox"/>	BLUE <input type="checkbox"/>	C= 3.0 <input type="checkbox"/>
C= 5.2 <input type="checkbox"/>	PURPLE <input type="checkbox"/>	C= 3.2 <input type="checkbox"/>
C= 5.4 <input type="checkbox"/>	GREEN <input type="checkbox"/>	C= 3.4 <input type="checkbox"/>
C= 5.6 <input type="checkbox"/>	GREY <input type="checkbox"/>	C= 3.6 <input type="checkbox"/>
C= 5.8 <input type="checkbox"/>	YELLOW <input type="checkbox"/>	C= 3.8 <input type="checkbox"/>
C= 6.0 <input type="checkbox"/>	WHITE <input type="checkbox"/>	C= 4.0 <input type="checkbox"/>
C= <input type="checkbox"/>	OTHER <input type="checkbox"/>	C= <input type="checkbox"/>
37.5	OIL/CST	32.5
25	REBOUND %	25

## PISTON

### HOLES SIZE

1.1MM ☐

1.2MM ☐

1.3MM ☒

1.4 MM ☐

OTHER ☐

7 taper down

7 taper down

## TYRES

## BODY

BRAND pro line BRAND stock

TYPE revolvers m3 TYPE

INSERT aka black WING OPTIONAL

WHEELS odonnell STOCK BRAND

TYPE

## ENGINE

TYPE alpha a-352 .23

MANIFOLD stock 0801

MUFFLER 0801

PLUG 97t od

FUEL vp 30%

## COMMENTS

webbed bladders  
white rear springs on the front shocks  
pink front springs on the rear of the truck

truck was very good all day.. very good through the rough stuff

NAME jeremy whiting

RACE midwest nitro series

DATE 9-15-12

TRACK clark rc park

CITY/COUNTRY usa

CONTACT

TRACK SIZE

☐ OPEN

☒ MEDIUM

☐ TIGHT

TRACK TRACTION

☒ HIGH

☒ MEDIUM

☐ LOW

TRACK SURFACE

☒ SMOOTH

☒ MEDIUM

☐ BUMPY

TRACK TYPE

☒ HARD PACKED

☐ SOFT DIRT

☐ CLAY

☒ BLUE GROOVE

☐ ASTRO TURF

☐ GRASS

TRACK CONDITION

☒ DRY

☒ DUSTY

☐ MUD

TEMP. F. / °C

AIR 55° TRACK 59°

LAPS 28.1

BEST LAPTIME 28.1 in LAP

RACE LENGTH 25 min

RACE RESULT 2nd

STEERING BLOCK

CASTER BLOCK

☒ PLASTIC

☒ PLASTIC

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU



☐ ALU

☐ ALU

☐ ALU

☐ ALU

☐ ALU

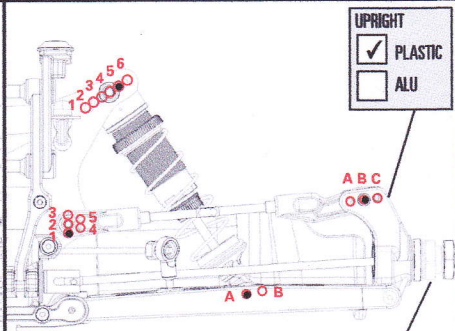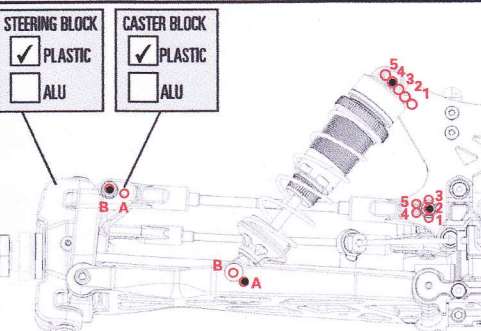

HEX ADAPTER ☐ +2MM ☐ +1MM ☒ 0MM

HEX ADAPTER ☐ +2MM ☐ +1MM ☒ 0MM

CASTER


☐ 10°

☒ 12°

SPINDLE

☐ HIGH


☒ LOW

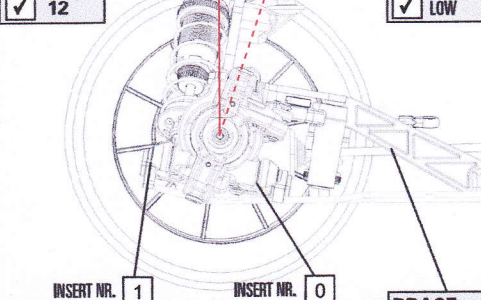

BRACE

☐ PLASTIC

☒ ALU

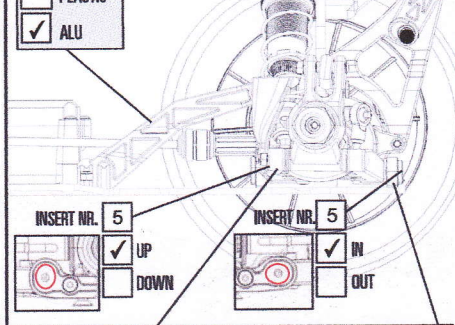

INSERT NR. 1

☒ UP

☐ DOWN

INSERT NR. 0

☐ UP

☐ DOWN

BRACE

☒ PLASTIC

☐ ALU

INSERT NR. 5

☒ UP

☐ DOWN

INSERT NR. 5

☒ IN

☐ OUT

☒ STANDARD BRACKET

☐ OPTIONAL TYPE

☒ STANDARD BRACKET

☐ OPTIONAL TYPE

ANTI ROLLBAR

☐ 1.8MM

☐ 2.0MM

☒ 2.3MM

☐ 2.5MM

☐ 2.7MM

OUT (-)

IN (+)

- 1°

+ 1°

FRONT TOE

STEERING BAR

☐ OPT 1

☐ OPT 2

☒ OPT 3

STEERING BAR

☐ OPT 1

☐ OPT 2

☒ OPT 3

STEERING BAR

☐ OPT 1

☐ OPT 2

☒ OPT 3

STEERING BAR

☐ OPT 1

☐ OPT 2

☒ OPT 3

STEERING BAR

☐ OPT 1

☐ OPT 2