



SET UP

DIFFERENTIAL OIL

FRONT

CENTER

REAR

CST

CST

CST

CLUTCH

TYPE: STANDARD

OPTIONAL

SHOE: ALU

PCS

SPRING

CARBON

PCS

SPRING

GEARING

CLUTCH BELL

T

SPUR GEAR

T

BRAKE BALANCERS

50/50

OPTION

BALANCER CLIPS:

0.5 MM

pcs

0.75MM

pcs

1.0 MM

pcs

1.25MM

pcs

1.5 MM

pcs

SHOCKS

FRONT

SPRING

REAR

C= 4.8

C= 5.0

C= 5.2

C= 5.4

C= 5.6

C= 5.8

C= 6.0

C=

PINK

BLUE

PURPLE

GREEN

GREY

YELLOW

WHITE

OTHER

C= 2.8

C= 3.0

C= 3.2

C= 3.4

C= 3.6

C= 3.8

C= 4.0

C=

OIL/CST

REBOUND %

PISTON

HOLES SIZE

1.1MM

1.2MM

1.3MM

1.4 MM

OTHER

TYRES

BODY

BRAND

BRAND

TYPE

TYPE

INSERT

WING

OPTIONAL

WHEELS

STOCK

BRAND

TYPE

ENGINE

TYPE

MANIFOLD

MUFFLER

PLUG

FUEL

COMMENTS

NAME

RACE

DATE

TRACK

CITY/COUNTRY

CONTACT

TRACK SIZE

OPEN

MEDIUM

TIGHT

TRACK TRACTION

HIGH

MEDIUM

LOW

TRACK SURFACE

SMOOTH

MEDIUM

BUMPY

TRACK TYPE

HARD PACKED

SOFT DIRT

CLAY

TRACK CONDITION

BLUE GROOVE

ASTRO TURF

GRASS

DRY

DUSTY

MUD

TEMP: F° / °C

AIR

TRACK

LAPS

BEST LAPTIME

in LAP

RACE LENGTH

RACE RESULT

STEERING BLOCK


PLASTIC

ALU


CASTER BLOCK

PLASTIC

ALU

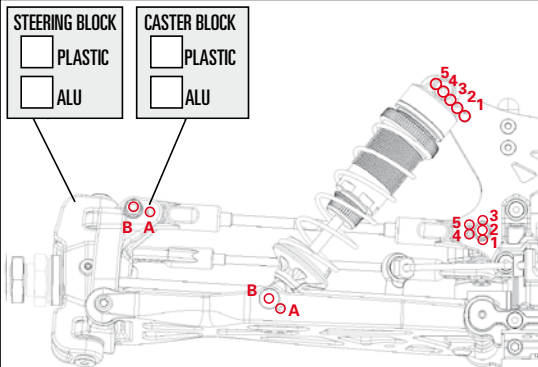


HEX ADAPTER +2MM +1MM 0MM

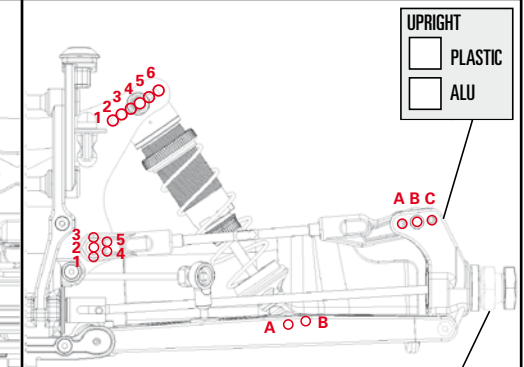

HEX ADAPTER +2MM +1MM 0MM

CASTER 10° 12°

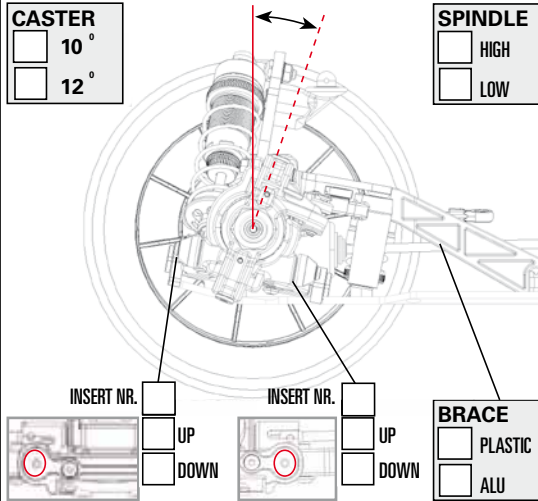

SPINDLE


HIGH

LOW


BRACE

PLASTIC

ALU

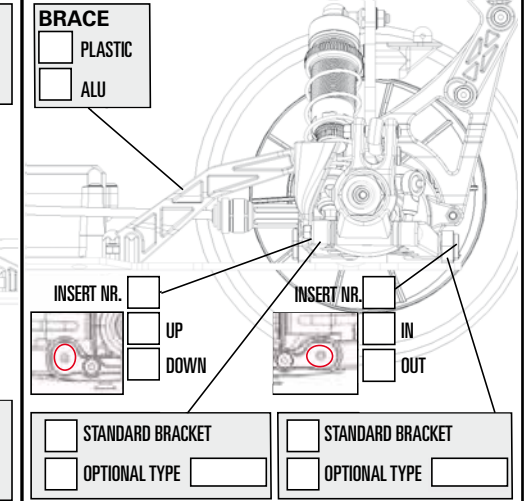

ANTI ROLLBAR 1.8MM 2.0MM 2.3MM 2.5MM 2.7MM

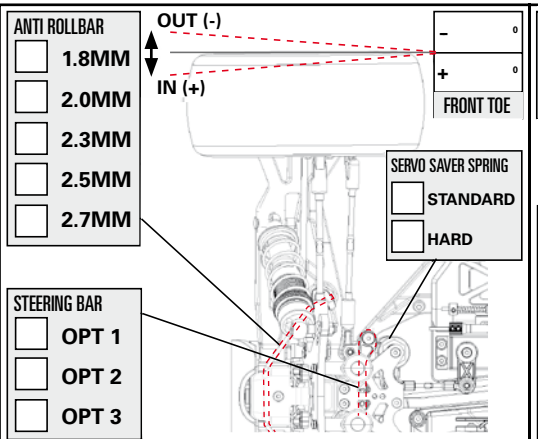


SERVO SAVER SPRING

STANDARD

HARD


STEERING BAR OPT 1 OPT 2 OPT 3

WHEELBASE SHIMS 1.25 2.5 3.75 5MM

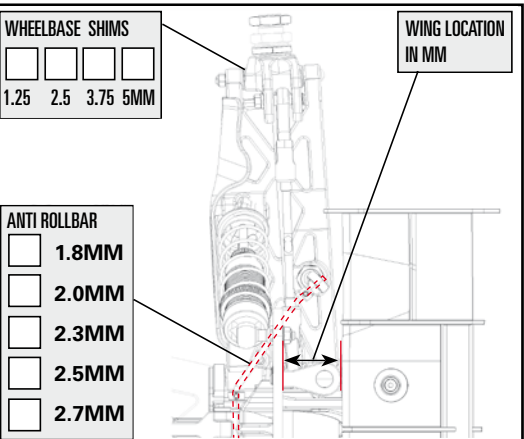

ANTI ROLLBAR 1.8MM 2.0MM 2.3MM 2.5MM 2.7MM

FRONT CAMBER

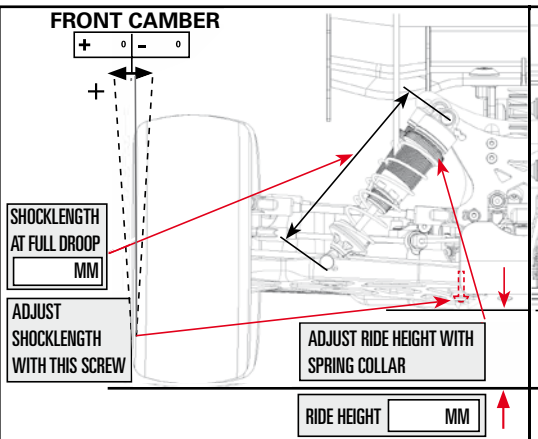

REAR CAMBER

