



#### DIFFERENTIAL OIL

FRONT	CENTER	REAR
17000 CST	20000 CST	10000 CST

#### CLUTCH

TYPE: STANDARD ☐ OPTIONAL ☐ buku adi

SHOE: ALU ☐ PCS ☐ SPRING ☐ adi

CARBON ☐ PCS ☐ SPRING ☐ adi

#### GEARING

CLUTCH BELL 13 T SPUR GEAR 50 T

#### BRAKE BALANCERS

50/50 ☐ BALANCER CLIPS: 0.5 MM ☐ pcs

OPTION ☒ 0.75MM ☐ pcs

1.0 MM ☐ pcs

1.25MM ☐ pcs

1.5 MM ☐ pcs

#### SHOCKS

FRONT	SPRING	REAR
C= 4.8 <input type="checkbox"/>	PINK <input type="checkbox"/>	C= 2.8 <input type="checkbox"/>
C= 5.0 <input type="checkbox"/>	BLUE <input type="checkbox"/>	C= 3.0 <input type="checkbox"/>
C= 5.2 <input type="checkbox"/>	PURPLE <input type="checkbox"/>	C= 3.2 <input type="checkbox"/>
C= 5.4 <input type="checkbox"/>	GREEN <input type="checkbox"/>	C= 3.4 <input type="checkbox"/>
C= 5.6 <input type="checkbox"/>	GREY <input type="checkbox"/>	C= 3.6 <input type="checkbox"/>
C= 5.8 <input type="checkbox"/>	YELLOW <input type="checkbox"/>	C= 3.8 <input type="checkbox"/>
C= 6.0 <input type="checkbox"/>	WHITE <input type="checkbox"/>	C= 4.0 <input type="checkbox"/>
C= <input type="checkbox"/>	OTHER <input type="checkbox"/>	C= <input type="checkbox"/>
500	OIL/CST	375
25	REBOUND %	25

#### PISTON

##### HOLES SIZE

7 hole tapered ☐ 1.1MM ☐

☒ 1.2MM ☐

☐ 1.3MM ☒

☐ 1.4 MM ☐

OTHER ☐ 7 hole tapered

#### TYRES

#### BODY

BRAND iconcepts BRAND sock

TYPE hybrids black TYPE

INSERT blue WING OPTIONAL

WHEELS iconcepts STOCK BRAND

TYPE

#### ENGINE

TYPE alpha .23

MANIFOLD round

MUFFLER 0801

PLUG 99t

FUEL vp powermaster

#### COMMENTS

buggy front 10° caster blocks.

buggy rear hubs

aluminum steer knuckles 600011

webbed bladders.

white rear springs on front

pinks front springs on the rear

try harder front sway bar or springs if truggy has too much front grip.

NAME jeremy whiting

RACE

icp money race

DATE

12-29-12

TRACK indoor clay

CITY/COUNTRY

indianapolis

CONTACT

TRACK SIZE ☐ OPEN ☒ MEDIUM ☒ TIGHT

TRACK TRACTION ☒ HIGH ☒ MEDIUM ☐ LOW

TRACK SURFACE ☐ SMOOTH ☒ MEDIUM ☐ BUMPY

TRACK TYPE ☒ HARD PACKED ☐ SOFT DIRT ☒ CLAY

☒ BLUE GROOVE ☐ ASTRO TURF ☐ GRASS

TRACK CONDITION ☒ DRY ☐ DUSTY ☐ MUD

TEMP: F° / °C

AIR 50

TRACK 45

LAPS 85

BEST LAPTIME 85

in LAP

RACE LENGTH 30 min

RACE RESULT tq and the win

STEERING BLOCK


☐ PLASTIC

☒ ALU

CASTER BLOCK

☒ PLASTIC

☐ ALU

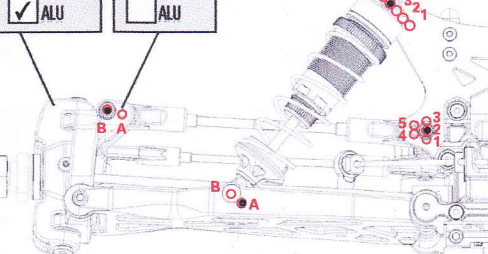


HEX ADAPTER ☐ +2MM ☐ +1MM ☒ 0MM

CASTER

☒ 10°

☐ 12°

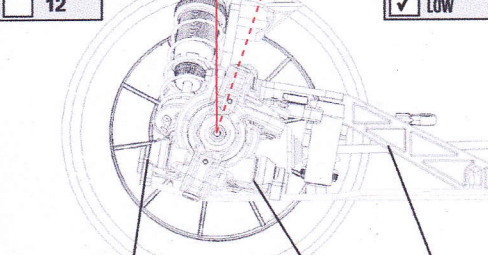

INSERT NR. 1

☒ UP

☐ DOWN

INSERT NR. 0

☐ UP

☐ DOWN

SPINDLE

☐ HIGH

☒ LOW

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

☐ PLASTIC

☒ ALU

ANTI ROLLBAR

☐ 1.8MM

☐ 2.0MM

☒ 2.3MM

☐ 2.5MM

☐ 2.7MM

☐ 1.8MM

☐ 2.0MM

☒ 2.3MM

☐ 2.5MM

☐ 2.7MM

☐ 1.8MM

☐ 2.0MM

☒ 2.3MM

☐ 2.5MM

☐ 2.7MM

☐ 1.8MM

☐ 2.0MM

☒ 2.3MM

☐ 2.5MM

☐ 2.7MM

☐ 1.8MM

☐ 2.0MM

☒ 2.3MM

☐ 2.5MM

☐ 2.7MM

☐ 1.8MM

☐ 2.0MM

☒ 2.3MM

☐ 2.5MM

☐ 2.7MM

☐ 1.8MM

OUT (-)

- 2°

IN (+)

FRONT TOE

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

FRONT CAMBER

+ 2°

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

☐ 1.25

☒ 2.5

☐ 3.75

☐ 5MM

SHOCKLENGTH AT FULL DROOP

113 MM

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

SHOCKLENGTH AT FULL DROOP

123 MM

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

SHOCKLENGTH AT FULL DROOP

123 MM

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR

ADJUST RIDE HEIGHT WITH SPRING COLLAR