

Serpent

2.0 COBBLE

SET UP

DRIVER **ALBERTO GARCIA**
TRACK **NUEVA RC**

RACE **NATIONALS**
CITY **ALICANTE**

DATE **17.03.13**
COUNTRY **SPAIN**

TRACK SIZE ☐ OPEN ☒ MEDIUM ☐ TIGHT
TRACK TRACTION ☐ HIGH ☒ MEDIUM ☐ LOW
TRACK SURFACE ☐ SMOOTH ☒ MEDIUM ☒ BUMPY
TRACK TYPE ☒ HARD PACKED ☐ SOFT DIRT ☐ CLAY
☒ BLUE GROOVE ☐ ASTRO TURF ☐ GRASS
TRACK CONDITION ☐ DRY ☒ DUSTY ☐ WETT

TEMP. F / °C
AIR **12°C** TRACK
LAPS
BEST LAP TIME **38.3**
QUALI RESULT **4th**
RACE RESULT **3rd**

DIFFERENTIAL OIL

FRONT	CENTER	REAR
5000 CST	7000 CST	3000 CST

TRANSMISSION SET UP

PINION	15 T	SPUR GEAR	46 T
FINAL DRIVE RATIO		ROLLOUT	mm
MOTOR	SP	TIMING	STD
ROTOR		ARMATURE	STD
ESC	SP	BATTERIES	SP 4400
BRUSHLESS	PROGRAM	PUNCH	INITIAL BRAKE
		0	0
			AUTO BRAKE
			0

BODY - WING

BODY	SERPENT
WING	SERPENT

SHOCKS

FRONT	SPRING	REAR
<input type="checkbox"/>	Orange	<input type="checkbox"/>
<input type="checkbox"/>	Red	<input type="checkbox"/>
<input checked="" type="checkbox"/>	Pink	<input type="checkbox"/>
<input type="checkbox"/>	Blue	<input type="checkbox"/>
<input type="checkbox"/>	Purple	<input checked="" type="checkbox"/>
<input type="checkbox"/>	Green	<input type="checkbox"/>
<input type="checkbox"/>	Other	<input type="checkbox"/>
360	OIL/CST	300
25	REBOUND %	25

☐ OPEN ☒ PISTON ☐ CLOSED

HOLES SIZE

<input type="checkbox"/>	1.1MM	<input type="checkbox"/>
<input type="checkbox"/>	1.2MM	<input type="checkbox"/>
<input checked="" type="checkbox"/>	1.3MM	<input type="checkbox"/>
<input type="checkbox"/>	1.4MM	<input checked="" type="checkbox"/>
	OTHER	


TYRES

BRAND	PROLINE
TYPE	TABER M3/M4
INSERT	PROLINE
WHEELS	PROLINE
STOCK <input checked="" type="checkbox"/> BRAND	TYPE

COMMENTS


SERPENT TO & 2x Radium
6 CARS IN THE MAIN FINAL.

STEERING BLOCK ☐ PLASTIC ☒ ALU
CASTER BLOCK ☒ PLASTIC ☐ ALU

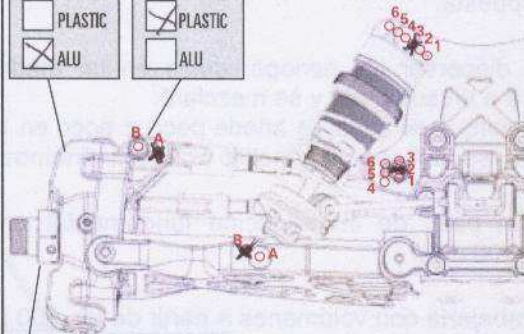


HEX ADAPTER ☒ 0mm ☐ mm

UPRIGHT ☒ PLASTIC ☐ ALU

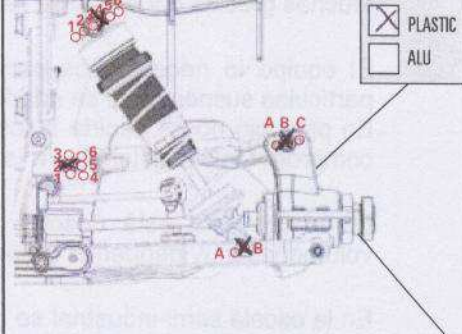


HEX ADAPTER -2mm

CASTER
16°

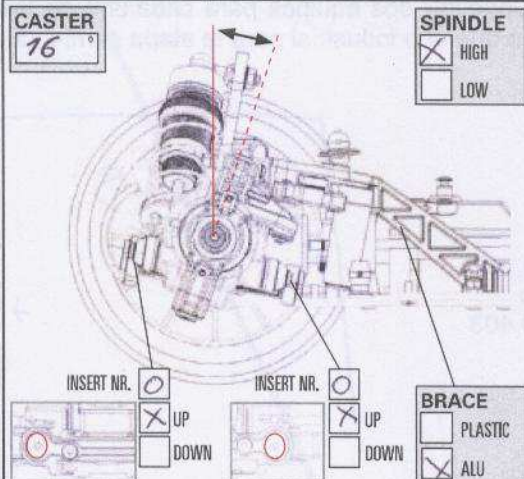


SPINDLE
☒ HIGH
☐ LOW

BRACE
☐ PLASTIC
☒ ALU

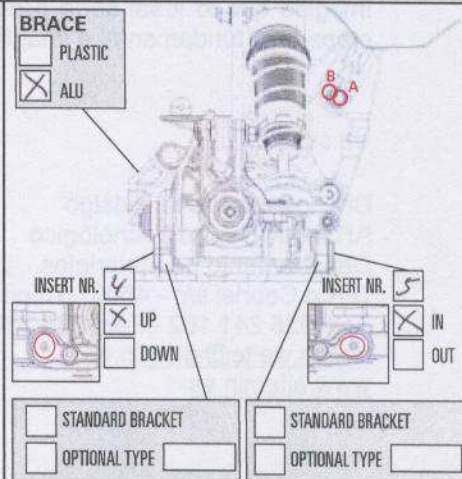

OUT (-) ☒ -2°
IN (+) ☐ +°
FRONT TOE

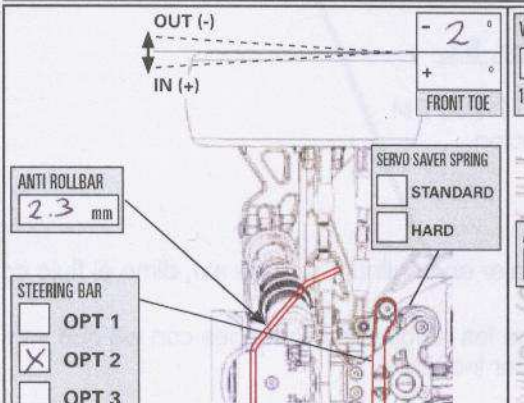


ANTI ROLLBAR
2.3 mm

SERVO SAVER SPRING
☐ STANDARD
☒ HARD


STEERING BAR
☐ OPT 1
☒ OPT 2
☐ OPT 3

WHEELBASE SHIMS
☐ 1.25 ☒ 2.5 ☐ 3.75 ☐ 5mm

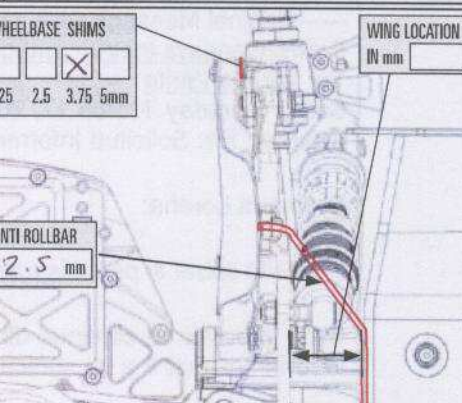

ANTI ROLLBAR
2.5 mm

FRONT CAMBER
+° -2°

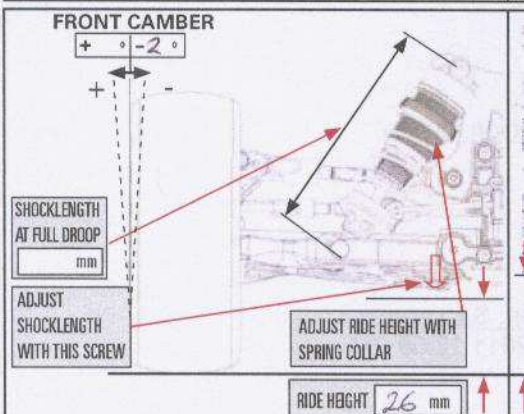


SHOCKLENGTH
AT FULL DROOP
mm

ADJUST
SHOCKLENGTH
WITH THIS SCREW

ADJUST RIDE HEIGHT WITH
SPRING COLLAR

RIDE HEIGHT 26 mm

REAR CAMBER
-2° +°

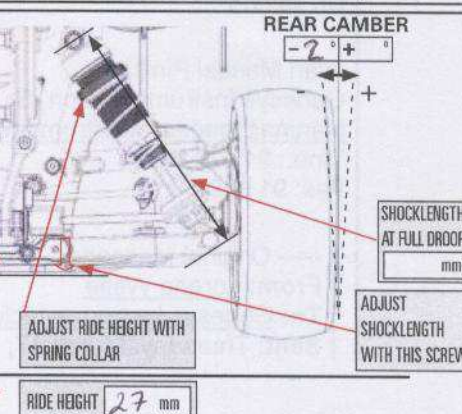

SHOCKLENGTH
AT FULL DROOP
mm

ADJUST
SHOCKLENGTH
WITH THIS SCREW

ADJUST RIDE HEIGHT WITH
SPRING COLLAR

RIDE HEIGHT 27 mm