



SET UP

977 VIPER

1ST		SPUR		2ND	
<input checked="" type="checkbox"/> 48T	<input type="checkbox"/> 49T	<input type="checkbox"/> 50T	<input type="checkbox"/> 44T	<input checked="" type="checkbox"/> 45T	<input type="checkbox"/> 46T

1ST		PINION		2ND	
<input checked="" type="checkbox"/> 15T	<input type="checkbox"/> 16T	<input type="checkbox"/> 17T	<input type="checkbox"/> 18T	<input checked="" type="checkbox"/> 19T	<input type="checkbox"/> 20T

CENTAX	
CLUTCHBELL	ALU <input type="checkbox"/> STEEL <input checked="" type="checkbox"/>
CLUTCHSHOE	BLACK <input type="checkbox"/> YELLOW <input type="checkbox"/> RED <input checked="" type="checkbox"/>

FRONT		REAR	
SHOCK ABSORBERS			
OIL 500 CST	<input type="radio"/> OPEN	OIL 600 CST	<input type="radio"/> CLOSED
SPRING PURPLE		SPRING PINK	

LEFT	RIGHT	TYRES	LEFT	RIGHT
		MAKE		
32 °	32 °	SHORE	35 °	35 °
67 mm	67 mm	DIAMETER	74 mm	74 mm
		5-MIN WEAR		



ENGINE	Picco		
VERSION	Evo 3	HEADSHIMS	std mm
GLOWPLUG		CARB DIA	9 mm

EXHAUST	NR 2015, 7-fins header		
---------	------------------------	--	--

FUEL	Ultimate Nitro Pro	25 %
------	--------------------	------

BODY TYPE	Blitz R18
-----------	-----------

BUMPER HOLES CUT	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>
------------------	---

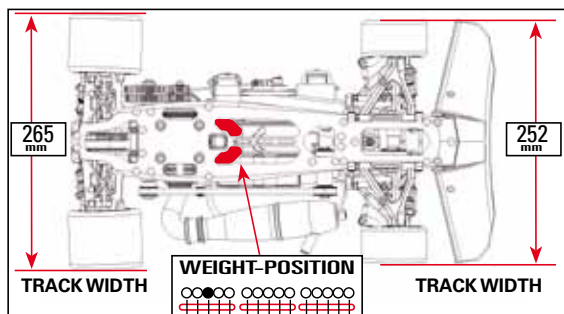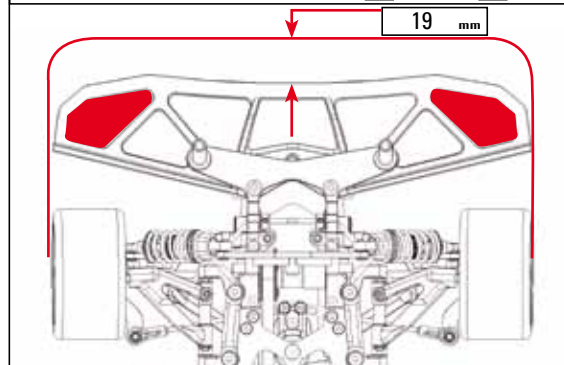

REMARKS	
---------	--

RACE	Dutch Nats Race 1 - 2013	DATE	07-04-2013
TRACK	MRG - Genk, Belgium	RESULT	11th overall
DRIVER:	Richard Engbersen	QUALIFYING POSITION	
LAYOUT:	<input type="checkbox"/> TECHNICAL <input checked="" type="checkbox"/> MIXED <input type="checkbox"/> FAST	QUALIFYING TIME	
TRACTION:	<input checked="" type="checkbox"/> LOW <input type="checkbox"/> MEDIUM <input type="checkbox"/> HIGH	FINAL POSITION	
TRACK TEMP	5 deg C	AIR TEMP	10 deg C

FRONT		REAR	
SHOCK POSITION		SHOCK POSITION	
CAMBERLINK POSITION		CAMBERLINK POSITION	
UPRIGHT SHIMS 0 mm		UPRIGHT SHIMS 1 mm	
SHIMS 1 mm		SHIMS 1 mm	
OFFSET 0.55 mm		DOWNSTOP 9 mm	
DOWNSTOP 1 mm		UPPER ARM INSERTS	
ROLL CENTER INSERTS		ROLL CENTER INSERTS	
FRONT		FRONT	
REAR		REAR	

FRONT		REAR	
CAMBER		CAMBER	
RIDE-HEIGHT 7 mm		RIDE-HEIGHT 9 mm	
RIDE-HEIGHT MEASURED WITH SET UP WHEEL Ø 68 mm		RIDE-HEIGHT MEASURED WITH SET UP WHEEL Ø 75 mm	

TOE-IN -1 °	SHIMS FRONT 1 mm	CONNECTOR TYPE	WHEELBASE 2 mm
SHIMS REAR 1 mm	ANTI-ROLL BAR MEDIUM	NONE <input type="checkbox"/>	TOE-IN 2.5 °
		RUBBER <input type="checkbox"/>	
		ALU <input checked="" type="checkbox"/>	
CASTER SPACERS 0 mm	FLEX YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>	ANTI-ROLL BAR MEDIUM	

BRACKET TYPE UP <input type="checkbox"/> DOWN <input checked="" type="checkbox"/>	INSERT-POSITION	WHEELBASE 3 mm	SHIMS 0 mm
		INSERT	