



2013 COBBLE

Paul Ciccarello 2013 AMS 4.0

TRACK SIZE	<input type="checkbox"/> OPEN	<input type="checkbox"/> MEDIUM	<input type="checkbox"/> TIGHT	TEMP. F° / °C
TRACK TRACTION	<input type="checkbox"/> HIGH	<input checked="" type="checkbox"/> MEDIUM	<input type="checkbox"/> LOW	AIR TRACK
TRACK SURFACE	<input checked="" type="checkbox"/> SMOOTH	<input type="checkbox"/> MEDIUM	<input type="checkbox"/> BUMPY	LAPS
TRACK TYPE	<input checked="" type="checkbox"/> HARD PACKED	<input type="checkbox"/> SOFT DIRT	<input type="checkbox"/> CLAY	BEST LAPTIME 26.9
	<input checked="" type="checkbox"/> BLUE GROOVE	<input type="checkbox"/> ASTRO TURF	<input type="checkbox"/> GRASS	QUALI RESULT
TRACK CONDITION	<input checked="" type="checkbox"/> DRY	<input type="checkbox"/> DUSTY	<input type="checkbox"/> WET	RACE RESULT 9th

DIFFERENTIAL OIL

FRONT	CENTER	REAR
10000 CST	12000 CST	6000 CST

TRANSMISSION SET UP

PIVON	17	T	SPUR GEAR	T
FINAL DRIVE RATIO			ROLLOUT	mm
MOTOR	tekin		TIMING	
ROTOR			ARMATURE	
ESC	tekin		BATTERIES	
BRUSHLESS	PROGRAM	PUNCH	INITIAL BRAKE	AUTO BRAKE

BODY - WING

BODY	serpent
WING	serpent

SHOCKS

FRONT	SPRING	REAR
<input type="checkbox"/>	Orange	<input type="checkbox"/>
<input type="checkbox"/>	Red	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>	Pink	<input type="checkbox"/>
<input type="checkbox"/>	Blue	<input type="checkbox"/>
<input type="checkbox"/>	Purple	<input type="checkbox"/>
<input type="checkbox"/>	Green	<input type="checkbox"/>
<input type="checkbox"/>	Other	<input type="checkbox"/>
500	OIL/CST	325
5mm	REBOUND %	5mm

☐ OPEN **PISTON** ☒ CLOSED


HOLES SIZE	
<input type="checkbox"/> 1.1MM	<input type="checkbox"/>
<input type="checkbox"/> 1.2MM	<input type="checkbox"/>
<input type="checkbox"/> 1.3MM	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> 1.4 MM	<input checked="" type="checkbox"/>
stock bladders	OTHER
	stock bladders

TYRES

BRAND	AKA
TYPE	Impact
INSERT	red
WHEELS	AKA
STOCK <input type="checkbox"/> BRAND	TYPE


COMMENTS

Stock pistons, rear 3 1.3 - 3 1.4, front 1.4

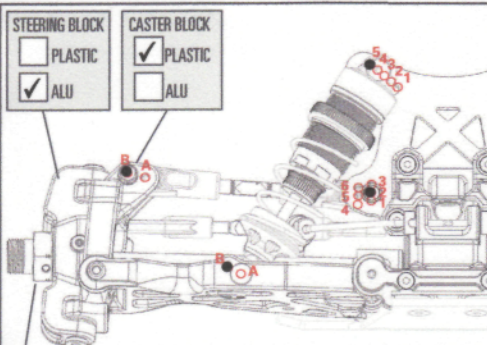


STEERING BLOCK	<input type="checkbox"/> PLASTIC	CASTER BLOCK	<input checked="" type="checkbox"/> PLASTIC
	<input checked="" type="checkbox"/> ALU		<input type="checkbox"/> ALU

HEX ADAPTER ☒ 0mm mm

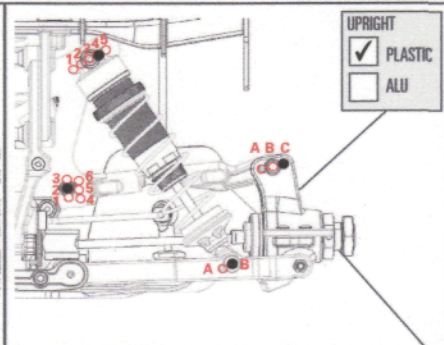

UPRIGHT	<input checked="" type="checkbox"/> PLASTIC
	<input type="checkbox"/> ALU

HEX ADAPTER -2mm

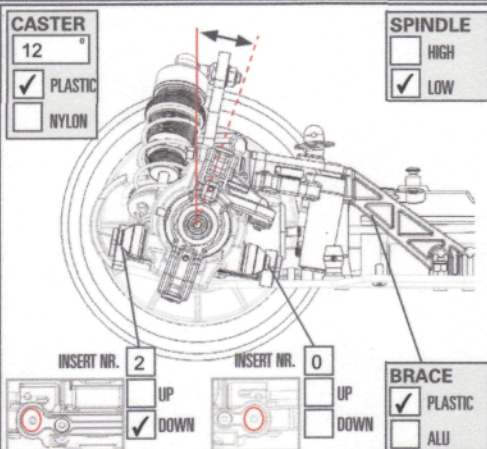


CASTER	12
	<input checked="" type="checkbox"/> PLASTIC
	<input type="checkbox"/> NYLON

SPINDLE	<input type="checkbox"/> HIGH
	<input checked="" type="checkbox"/> LOW

INSERT NR.	2	UP	<input checked="" type="checkbox"/> DOWN
------------	---	----	--

INSERT NR.	0	UP	<input type="checkbox"/> DOWN
------------	---	----	-------------------------------

BRACE	<input checked="" type="checkbox"/> PLASTIC
	<input type="checkbox"/> ALU

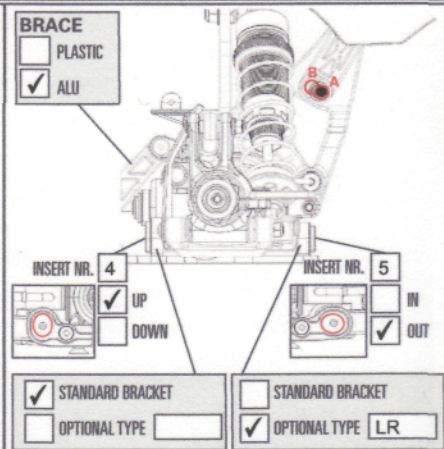


BRACE	<input type="checkbox"/> PLASTIC
	<input checked="" type="checkbox"/> ALU

INSERT NR.	4	UP	<input checked="" type="checkbox"/> DOWN
------------	---	----	--

INSERT NR.	5	IN	<input checked="" type="checkbox"/> OUT
------------	---	----	---


<input checked="" type="checkbox"/> STANDARD BRACKET	<input type="checkbox"/> STANDARD BRACKET
<input type="checkbox"/> OPTIONAL TYPE	<input checked="" type="checkbox"/> OPTIONAL TYPE LR

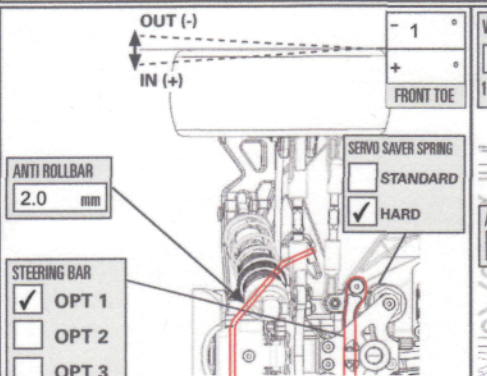

ANTI ROLLBAR	2.0 mm
--------------	--------


STEERING BAR	<input checked="" type="checkbox"/> OPT 1
	<input type="checkbox"/> OPT 2
	<input type="checkbox"/> OPT 3

SERVO SAVER SPRING	<input type="checkbox"/> STANDARD
	<input checked="" type="checkbox"/> HARD

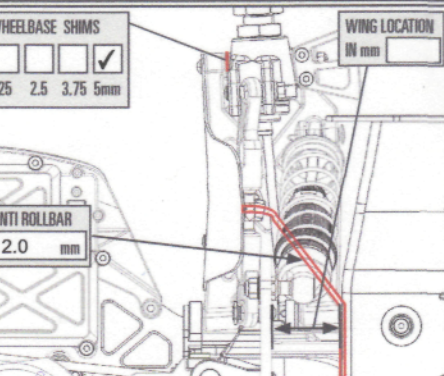

WHEELBASE SHIMS	<input type="checkbox"/> 1.25	<input type="checkbox"/> 2.5	<input type="checkbox"/> 3.75	<input checked="" type="checkbox"/> 5mm
-----------------	-------------------------------	------------------------------	-------------------------------	---

ANTI ROLLBAR	2.0 mm
--------------	--------

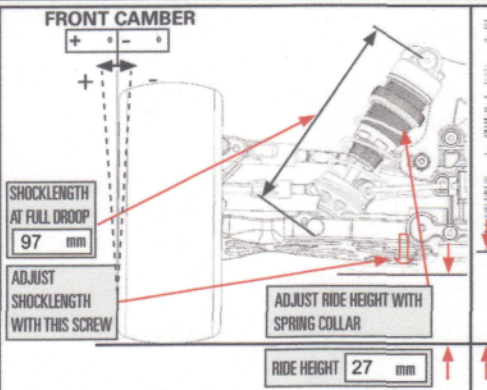


FRONT CAMBER

SHOCKLENGTH AT FULL DROOP	97 mm
---------------------------	-------

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

RIDE HEIGHT	27 mm
-------------	-------

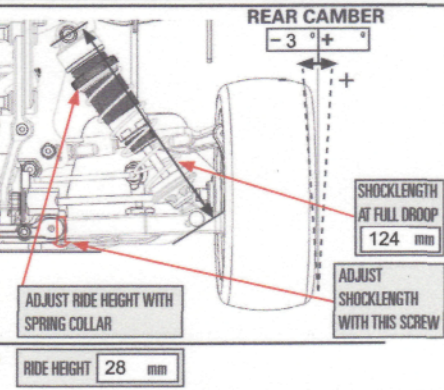

REAR CAMBER

SHOCKLENGTH AT FULL DROOP	124 mm
---------------------------	--------

ADJUST SHOCKLENGTH WITH THIS SCREW

ADJUST RIDE HEIGHT WITH SPRING COLLAR

RIDE HEIGHT	28 mm
-------------	-------