



SET UP

977 VIPER

1ST	SPUR	2ND
<input checked="" type="checkbox"/> 48T	<input type="checkbox"/> 49T	<input type="checkbox"/> 50T
<input type="checkbox"/> 44T	<input type="checkbox"/> 45T	<input checked="" type="checkbox"/> 46T

1ST	PINION	2ND
<input checked="" type="checkbox"/> 15T	<input type="checkbox"/> 16T	<input type="checkbox"/> 17T
<input type="checkbox"/> 18T	<input checked="" type="checkbox"/> 19T	<input type="checkbox"/> 20T

CENTAX	
CLUTCHBELL	ALU <input type="checkbox"/> STEEL <input type="checkbox"/>
CLUTCHSHOE	BLACK <input type="checkbox"/> YELLOW <input type="checkbox"/> RED <input type="checkbox"/>


FRONT		REAR	
SHOCK ABSORBERS			
OIL		OIL	
800 CST		800 CST	
SPRING		SPRING	
purple		pink	
OPEN		CLOSED	

LEFT	RIGHT	TYRES	LEFT	RIGHT
HR	HR	MAKE	HR	HR
32 °	32 °	SHORE	35 °	35 °
mm	mm	DIAMETER	mm	mm
mm	mm	5-MIN WEAR	mm	mm

ENGINE			
VERSION		HEADSHIMS	mm
GLOWPLUG		CARB DIA	mm

EXHAUST			
FUEL			%

BODY TYPE	P909
BUMPER HOLES CUT	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>

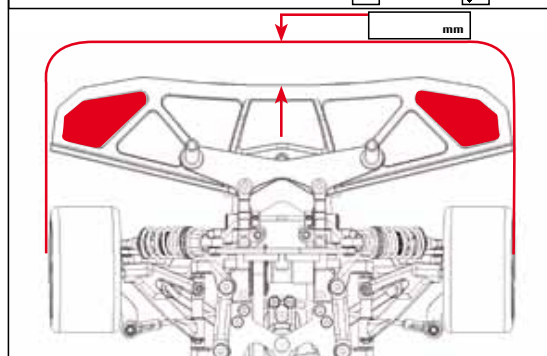

266 mm		252 mm
TRACK WIDTH	WEIGHT-POSITION	TRACK WIDTH
	ooooo ooooo ooooo	
	+++++ +++++ +++++	

REMARKS	no weights, carbon discs front and rear
---------	---

RACE	Swedish cup	DATE	2014-05-18
TRACK	Örkelljunga	RESULT	
DRIVER:	Mikael Fransson	QUALIFYING POSITION	1
LAYOUT:	<input type="checkbox"/> TECHNICAL <input checked="" type="checkbox"/> MIXED <input type="checkbox"/> FAST	QUALIFYING TIME	
TRACTION:	<input type="checkbox"/> LOW <input type="checkbox"/> MEDIUM <input checked="" type="checkbox"/> HIGH	FINAL POSITION	1
TRACK TEMP		AIR TEMP	

FRONT	<input checked="" type="checkbox"/> APPLIED	REAR
SHOCK POSITION	SHOCK POSITION	CAMBERLINK POSITION
UPRIGHT SHIMS 0 mm	SHIMS 1 mm	SHIMS 0,5 mm
OFFSET 0,5 mm	DOWNSTOP 1 mm	UPPER ARM INSERTS
ROLL CENTER INSERTS	FRONT	REAR
DOWNSTOP 8 mm		

R 1,5 °	1 ° L	CAMBER	R 2,5 °	2 ° L
RIDE-HEIGHT 7 mm	RIDE-HEIGHT 8,5 mm			
RIDE-HEIGHT MEASURED WITH SET UP WHEEL Ø	RIDE-HEIGHT MEASURED WITH SET UP WHEEL Ø			

TOE-IN -1 °	SHIMS FRONT 1 mm	SHIMS REAR 1 mm	CONNECTOR TYPE	WHEELBASE 1 mm	TOE-IN 2 °
	ANTI-ROLL BAR 1	ANTI-ROLL BAR 2	NONE <input type="checkbox"/>	RUBBER <input type="checkbox"/>	ALU <input checked="" type="checkbox"/>
CASTER SPACERS 5 mm	FLEX YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>				

BRACKET TYPE UP <input type="checkbox"/> DOWN <input checked="" type="checkbox"/>	INSERT-POSITION	WHEELBASE 2 mm	SHIMS 0 mm	INSERT