

SET UP



1ST		SPUR		2ND	
<input type="checkbox"/> 61	<input checked="" type="checkbox"/> 62	<input type="checkbox"/> 63	<input type="checkbox"/> 56	<input type="checkbox"/> 57	<input checked="" type="checkbox"/> 58

1ST		PINION		2ND	
<input type="checkbox"/> 18	<input checked="" type="checkbox"/> 19	<input type="checkbox"/> 20	<input type="checkbox"/> 23	<input checked="" type="checkbox"/> 24	<input type="checkbox"/> 25

SHOCK ABSORBERS			
FRONT		REAR	
OIL	600 cst	OIL	700 cst
SPRINGS	purple	SPRINGS	red
<input type="radio"/> Open <input checked="" type="radio"/> Closed		<input type="radio"/> Open <input checked="" type="radio"/> Closed	


FRONT		TYRES		REAR	
RIGHT	LEFT	Controlled Tyre <input type="checkbox"/>	RIGHT	LEFT	
Matrix	Matrix	MAKE	Matrix	Matrix	
32	32	SHORE	32	32	
		DIAMETER			
		5-MIN WEAR			

FRONT			ANTI-ROLL BARS			REAR		
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SOFT	MEDIUM	HARD	SOFT	MEDIUM	HARD	SOFT	MEDIUM	HARD

ENGINE			
ENGINE	Picco		
VERSION	Otto	HEADSHIMS	0.4 mm
GLOWPLUG	7 cold	CARB DIA	9mm mm
PIPE	2120	MANIFOLD	standard
FUEL	Runner Time	NITRO	16 %

CENTAX			
CLUTCHBELL	ALU <input type="checkbox"/>	ALU COATED <input checked="" type="checkbox"/>	STEEL <input type="checkbox"/>
CLUTCHSHOE	YELLOW <input checked="" type="checkbox"/>	RED <input type="checkbox"/>	BLACK <input type="checkbox"/>
CLUTCH SPRING	x-hard 903647	CLUTCH BELL GAP	0.6 mm

AERODYNAMIC CONFIGURATION			
BODY			
BRAND	Matrix	TYPE	R18
BODY POSITION	20 mm		
AIR TRIM POSITION	8 mm		
BUMPER INSERTS	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO		

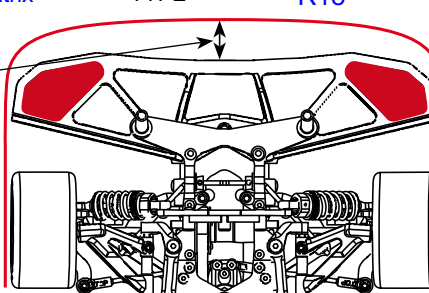

REMARKS
stiffener set 903653 alu servosaver bottom 903589 modified rear camber link + bracket

RACE	SK West no. 3	DATE	05-06-16
TRACK	AMC Hamm	QUALIFYING POSITION	2nd
DRIVER	Michael Salven	QUALIFYING TIME	20 5:15,3
TRACTION: LOW <input type="checkbox"/> MEDIUM <input checked="" type="checkbox"/> HIGH <input type="checkbox"/>	STARTING POSITION	1st	
TRACK TEMP 30	AIR TEMP 25	FINAL POSITION 1st	

FRONT		REAR	
AERO DISKS YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	UPPER ARM INSERTS	SHOCK POSITION	SHOCK POSITION
OFFSET 2.0 mm		SHIMS 0 mm	AERO DISKS YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>
DOWNSTOP 1 mm		DOWNSTOP 8 mm	OFFSET 1 mm
SHOCK BRACKET NARROW <input type="checkbox"/> WIDE <input checked="" type="checkbox"/>	SUSPENSION BRACKET WIDE <input type="checkbox"/> NARROW <input checked="" type="checkbox"/>	ROLL CENTER INSERTS Front <input type="radio"/> Rear <input type="radio"/>	
FRONT CAMBER R -1.0° L -1.0°		REAR CAMBER R -2.5° L -2.0°	
RIDE HEIGHT 6.5 mm WITH TYRE Ø 69 mm		RIDE HEIGHT 8.5 mm WITH TYRE Ø 75 mm	
ROLL CENTER SPACER Shims Front 0 mm Shims Rear 0 mm		WHEEL BASE 0 <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 <input type="checkbox"/>	
FRONT TOE -1.0°		REAR TOE 3.0°	
CASTER SPACERS 4 mm			
INSERT POSITION	KINGPIN 1st mm	ACKERMANN	
SHIMS 0 mm		TRACKROD POSITION	
WHEEL BASE 0 <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3 <input type="checkbox"/>			
TRACK WIDTH 253 mm		TRACK WIDTH 264 mm	
TOTAL CAR WEIGHT 2430 grams	WEIGHT POSITION 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100	WEIGHT POSITION 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100	