

DRIVER, TRACK AND RESULTS

DRIVER	Default	COUNTRY		WEATHER	AIR TEMP	TRACK TEMP	<input checked="" type="checkbox"/> DRY <input type="checkbox"/> INTERMEDIATE <input type="checkbox"/> WET
TRACK	TRACTION <input type="checkbox"/> LOW <input checked="" type="checkbox"/> MEDIUM <input type="checkbox"/> HIGH COMMENTS						
RACE	DATE	QUALY POS.	QUALY TIME	STARTING POS.	FINAL POS.		

FRONT		SHOCK ABSORBERS		REAR	
1000	cst	OIL		1000	cst
Black	SPRINGS				Silver
mm		REBOUND			mm
N° HOLES	6	Ø 1.2 mm	PISTONS	N° HOLES	6 Ø 1.2 mm
<input checked="" type="checkbox"/> FLAT	PISTON TYPE		<input checked="" type="checkbox"/> FLAT		
<input type="checkbox"/> CONICAL			<input type="checkbox"/> CONICAL		

ANTI-ROLL BARS	
FRONT ANTI-ROLL BAR	2.3 mm
REAR ANTI-ROLL BAR	2.7 mm

DIFFERENTIAL OIL	
FRONT DIFF	1000000 cst
REAR DIFF	80000 cst

1ST		SPUR GEARS		2ND	
<input type="checkbox"/> 61	<input type="checkbox"/> 62	<input checked="" type="checkbox"/> 63		<input type="checkbox"/> 56	<input type="checkbox"/> 57 <input checked="" type="checkbox"/> 58






1ST		PINION		2ND	
<input type="checkbox"/> 18	<input checked="" type="checkbox"/> 19	<input type="checkbox"/> 20		<input type="checkbox"/> 23	<input checked="" type="checkbox"/> 24 <input type="checkbox"/> 25

CLUTCH	
CLUTCH BELL	
<input checked="" type="checkbox"/> STANDARD <input type="checkbox"/> VENTED <input type="checkbox"/> ALU	FLYWHEEL
	<input type="checkbox"/> STEEL <input checked="" type="checkbox"/> ALU
CLUTCH SHOES	
SHOE TYPE	Carbon x 4 with SPRINGS TYPE 0.95 mm
SHOE TYPE	x with SPRINGS TYPE mm

ENGINE, PIPE AND FUEL	
ENGINE BRAND	TYPE
HEADSHIMS mm	GLOWPLUG CARB Ø mm
EXHAUST PIPE	MANIFOLD
FUEL BRAND	NITRO %

FRONT TIRES		Controlled Tire	REAR
MAKE			
TYPE			
INSERTS			
WHEELS			

AERODYNAMIC CONFIGURATION	
BODY BRAND	BODY POSITION mm
BODY TYPE	
WING BRAND	
WING TYPE	

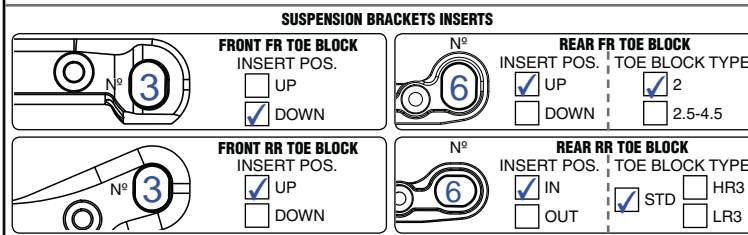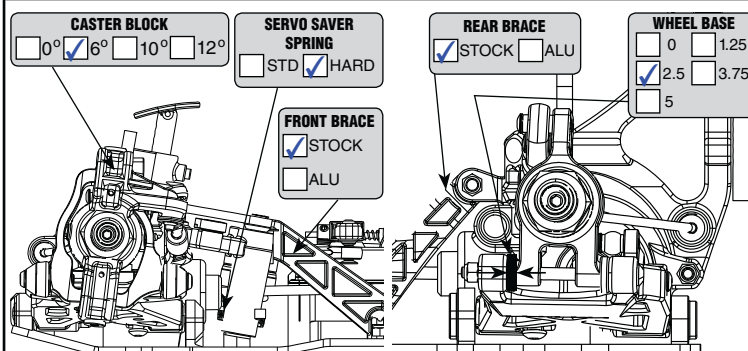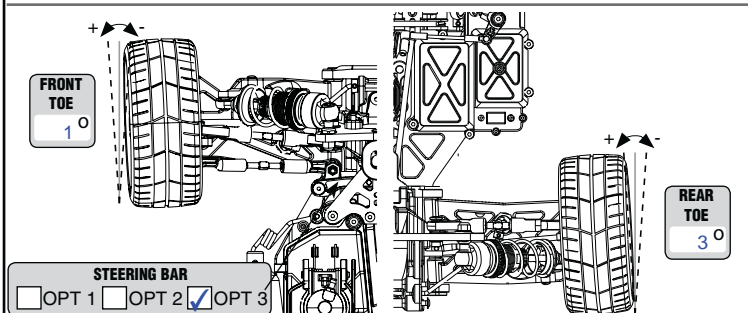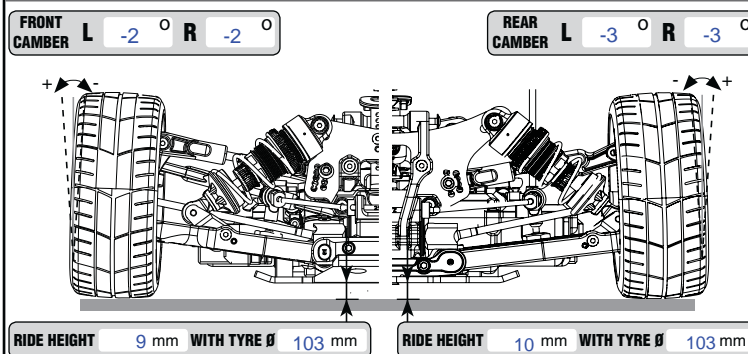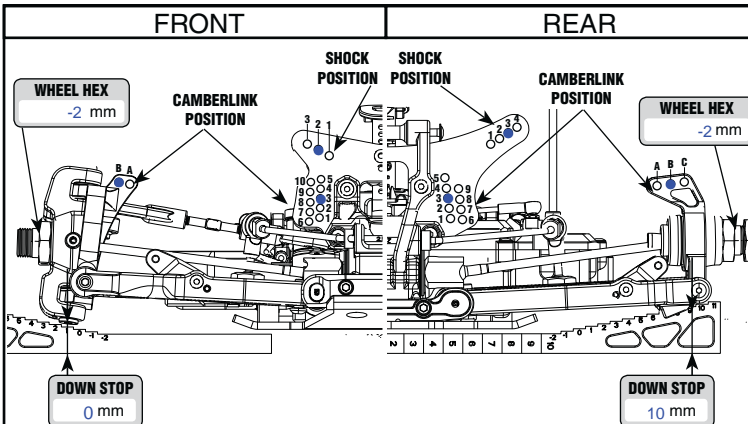

REMARKS