

DRIVER, TRACK AND RESULTS


DRIVER	Viktor Wilck	COUNTRY	Sweden	WEATHER	AIR TEMP 20c	TRACK TEMP 20c	<input type="checkbox"/> DRY <input type="checkbox"/> INTERMEDIATE <input type="checkbox"/> WET
TRACK	DHI CUP 2018	SURFACE	<input type="checkbox"/> ASPHALT <input checked="" type="checkbox"/> CARPET	TRACTION	<input type="checkbox"/> LOW <input checked="" type="checkbox"/> MEDIUM <input type="checkbox"/> HIGH	COMMENTS	Low-Medium grip
RACE	DHI CUP 2018	DATE	2018-01-07	QUALY POS.	7	QUALY TIME	STARTING POS. FINAL POS. 5

FRONT DRIVE TRAIN		REAR	
<input type="checkbox"/> GEAR DIFF	cst	<input checked="" type="checkbox"/> GEAR DIFF	7.000 cst
<input checked="" type="checkbox"/> SPOOL			

FRONT HEAVE DAMPER		REAR	
OIL	1200 cst	OIL	1200 cst
SPRINGS	orange	SPRINGS	orange
SHIMS	mm <input type="checkbox"/> <input checked="" type="checkbox"/>	SHIMS	mm <input type="checkbox"/> <input checked="" type="checkbox"/>

FRONT ROLL DAMPER		REAR	
OIL	7.000 cst	OIL	10.000 cst
SPRINGS	pink	SPRINGS	red
<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	
N HOLES	1 0 mm	N HOLES	1 0 mm

REAR REACTIVE SYSTEM	
<input checked="" type="checkbox"/> LONG RRS LINK	<input type="checkbox"/> SHORT RRS LINK

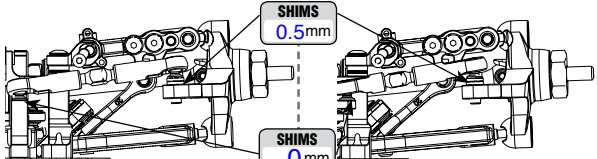


SHIMS 0.5mm
SHIMS 0mm

FRONT TYRES		REAR	
LRP	MAKE AND TYPE	LRP	
CS high Grip	ADDITIVE	CS High Grip	
5min	ADDITIVE TIMING	10min	

ELECTRONICS	
BATTERY	
BRAND Arrowmax	CAPACITY 5200mAh WEIGHT 275 grams
MOTOR	
BRAND DASH	TYPE 4.5t TIMING 30
ESC	
BRAND DASH	TYPE


RATIO CONFIGURATION	
64	PITCH SPUR GEAR TEETH 112
64	PITCH PINION TEETH 30
FINAL DRIVE RATIO 7.46	ROLL OUT mm

AERODYNAMIC CONFIGURATION	
BODY BRAND/TYPE	PF Type-s
BODY POSITION	5 mm

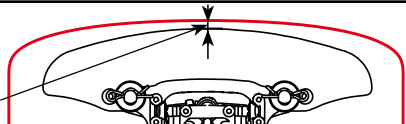


REMARKS	


FRONT		REAR	
PULLROD LENGTH short mm	ROLL CENTER SHIMS 0.5 mm	ROLL CENTER SHIMS 0 mm	PULLROD LENGTH short mm
WHEEL HEX -0.75mm			WHEEL HEX -0.75 mm
DOWN STOP 2mm		DOWN STOP 1.5 mm	

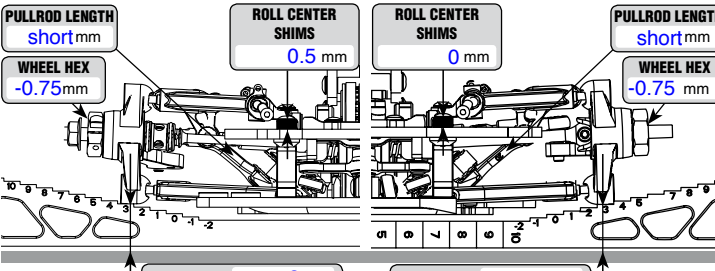


FRONT		REAR	
UPPER ARM INSERT	UPPER ARM INSERT	UPPER ARM INSERT	UPPER ARM INSERT
FRONT CAMBER R 1.0° L 1.0°		REAR CAMBER R 2.0° L 2.0°	
RIDE HEIGHT WITH TYRE Ø 5.0 mm		RIDE HEIGHT WITH TYRE Ø 5.2 mm	

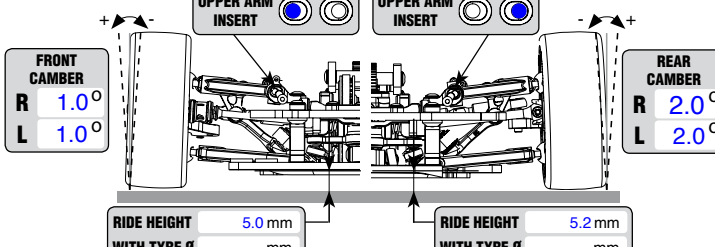


FRONT		REAR	
CASTER 3 mm	SPACERS 6 mm	OUTER POSITION	
FRONT TOE -1.0°		REAR TOE 2.75°	
ACKERMANN			

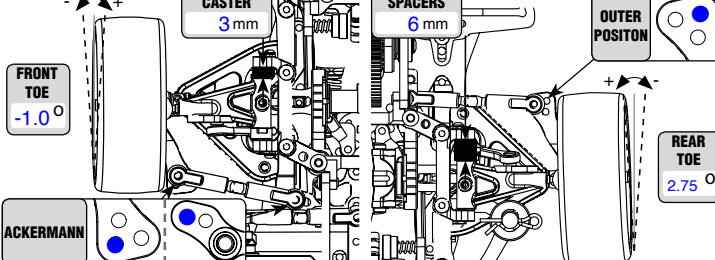

FRONT		REAR	
WHEEL BASE 0 1 2 3 4	SHIMS 2 mm	WHEEL BASE 0 1 2 3 4	
ROLL CENTER BOTTOM INSERTS MID LOW MID HIGH		ROLL CENTER BOTTOM INSERTS MID LOW MID HIGH	

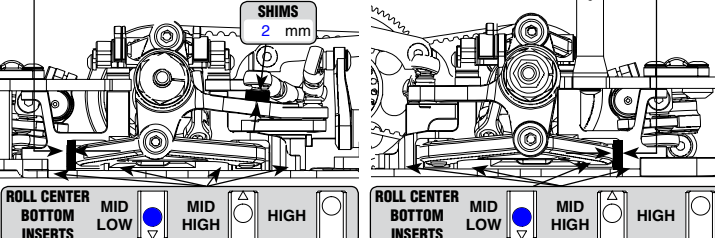

MOTOR MOUNT		FLEX CONFIGURATION	
<input checked="" type="checkbox"/> STD	<input type="checkbox"/> SPLIT	CONNECTING SCREWS	
CHASSIS <input checked="" type="checkbox"/> CARBON <input type="checkbox"/> ALU THICKNESS 2 mm	TOPDECK THICKNESS 3 mm		

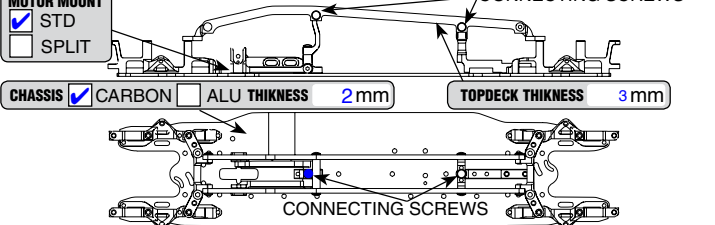

WEIGHT DISTRIBUTION	
CAR WEIGHT 1355 grams	BATTERY POS. <input checked="" type="checkbox"/> FR <input type="checkbox"/> MID <input type="checkbox"/> RR
TRACK WIDTH 188 mm	TRACK WIDTH 187 mm

