



## STEP 1




There are two options to assemble the new ALU CLUTCH BELL V2:

- 1- Use 3x 5x10x3 ball bearings
- 2- Use 2x 5x10x4 ball bearings with the standard spacer between assembled between the bearings.

This manual only shows how to assemble the new ALU CLUTCH BELL V2. For assembling the complete clutch please check the kit manual.

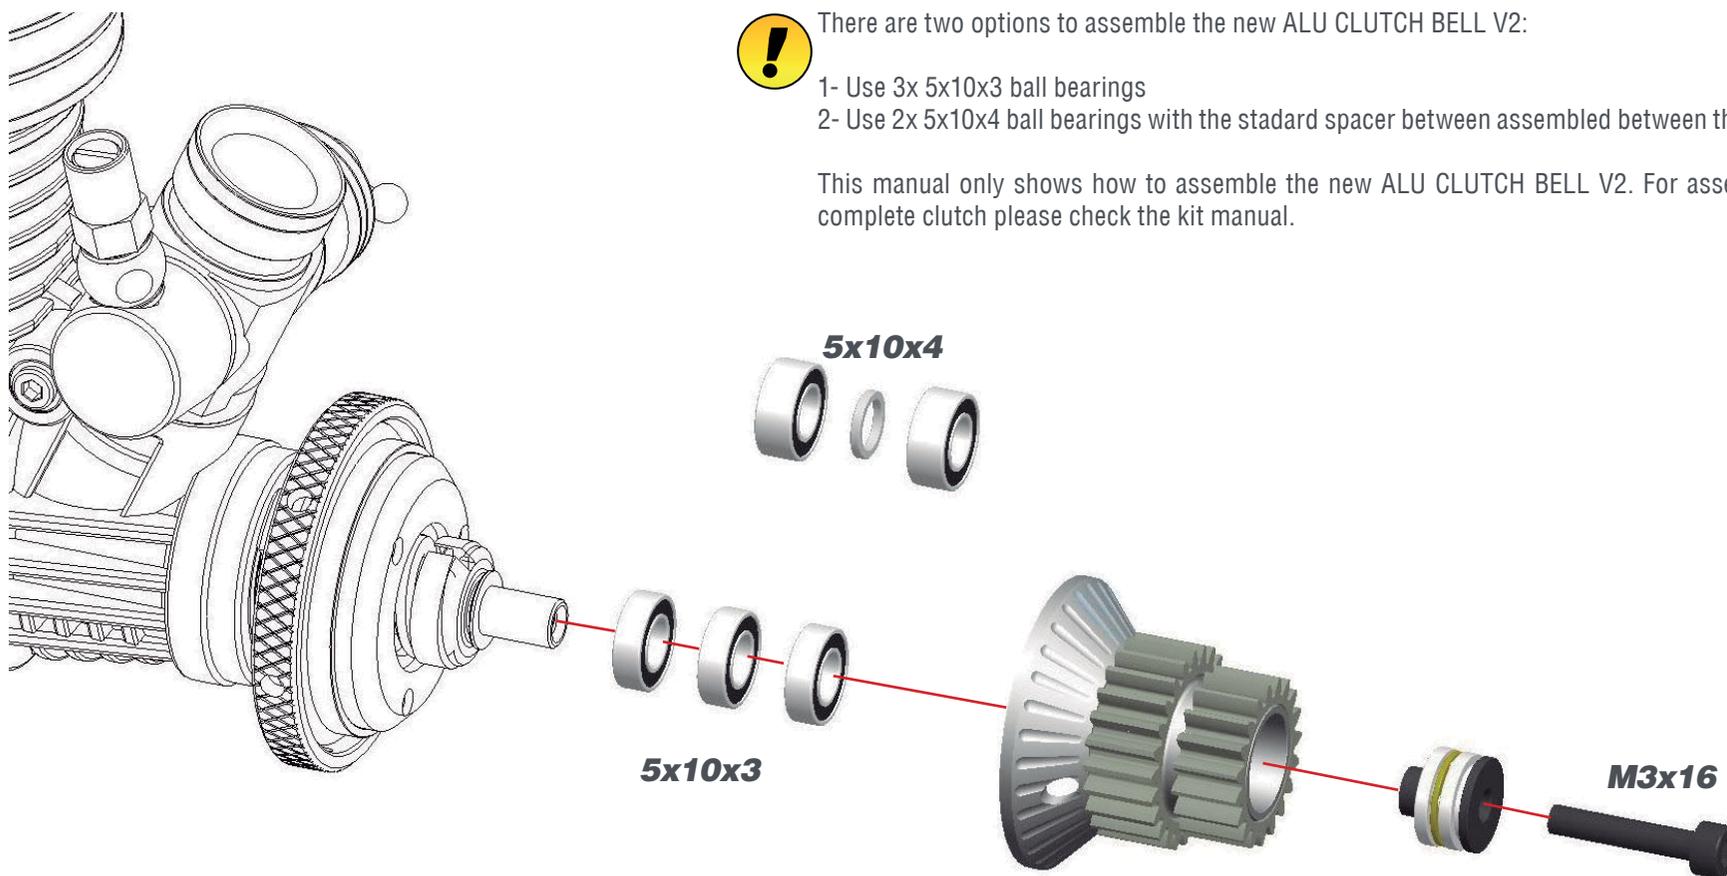

5x10x4



5x10x3



M3x16