

DRIVER, TRACK AND RESULTS

DRIVER	Default	COUNTRY		WEATHER	AIR TEMP	TRACK TEMP	<input type="checkbox"/> DRY <input type="checkbox"/> INTERMEDIATE <input type="checkbox"/> WET
TRACK	TRACTION <input type="checkbox"/> LOW <input type="checkbox"/> MEDIUM <input type="checkbox"/> HIGH COMMENTS						
RACE	DATE	QUALY POS.	QUALY TIME	STARTING POS.	FINAL POS.		

FRONT SHOCK ABSORBERS		REAR	
1000 cst	OIL	1000 cst	
Black	SPRINGS	Silver	
2 mm	REBOUND	2 mm	
N° HOLES 6 Ø 1.3 mm	PISTONS N° HOLES 6 Ø 1.3 mm		
<input checked="" type="checkbox"/> FLAT <input type="checkbox"/> CONICAL	PISTON TYPE <input checked="" type="checkbox"/> FLAT <input type="checkbox"/> CONICAL		

ANTI-ROLL BARS	
FR ANTI-ROLL BAR 2.5 mm	RR ANTI-ROLL BAR 2.4 mm

DIFFERENTIAL OIL AND POSITION	
FR DIFF 1000000 cst	RR DIFF 30000 cst
POSITION <input type="checkbox"/> LOW <input type="checkbox"/> MID LOW <input checked="" type="checkbox"/> HIGH <input type="checkbox"/> MID HIGH	POSITION <input type="checkbox"/> LOW <input type="checkbox"/> MID LOW <input checked="" type="checkbox"/> HIGH <input type="checkbox"/> MID HIGH

1ST PINION AND SPUR GEAR		2ND	
<input type="checkbox"/> 18 <input checked="" type="checkbox"/> 19 <input type="checkbox"/> 20	PINION <input type="checkbox"/> 23 <input checked="" type="checkbox"/> 24 <input type="checkbox"/> 25	<input type="checkbox"/> 61 <input type="checkbox"/> 62 <input checked="" type="checkbox"/> 63	SPUR GEAR <input type="checkbox"/> 56 <input type="checkbox"/> 57 <input checked="" type="checkbox"/> 58


CLUTCH	
CLUTCH BELL <input checked="" type="checkbox"/> STEEL <input type="checkbox"/> ALU <input type="checkbox"/> STANDARD <input checked="" type="checkbox"/> VENTED	
<input checked="" type="checkbox"/> ADJUSTABLE CLUTCH CLUTCH SHOES Black	
CLUTCH SPRING X-hard	CLUTCH PRELOAD mm
<input type="checkbox"/> 4 PIN CLUTCH FLYWHEEL <input type="checkbox"/> STEEL <input type="checkbox"/> ALU	
CLUTCH SHOES	CLUTCH SPRINGS
SHOE TYPE x with SPRINGS TYPE mm	
SHOE TYPE x with SPRINGS TYPE mm	

ENGINE, PIPE AND FUEL	
ENGINE BRAND	TYPE
HEADSHIMS mm	GLOWPLUG CARB Ø mm
EXHAUST PIPE	MANIFOLD
FUEL BRAND	NITRO %


FLEX CONFIGURATION	
ENGINE MOUNT <input checked="" type="checkbox"/> STANDARD <input type="checkbox"/> MONOBLOCK	

FRONT TIRES		REAR	
Controlled Tire	<input type="checkbox"/>		
MAKE			
TYPE			
INSERTS			
WHEELS			

AERODYNAMIC CONFIGURATION	
BODY BRAND & TYPE	BODY POSITION mm
WING BRAND & TYPE	
REAR DIFFUSER <input type="checkbox"/> YES <input type="checkbox"/> NO	

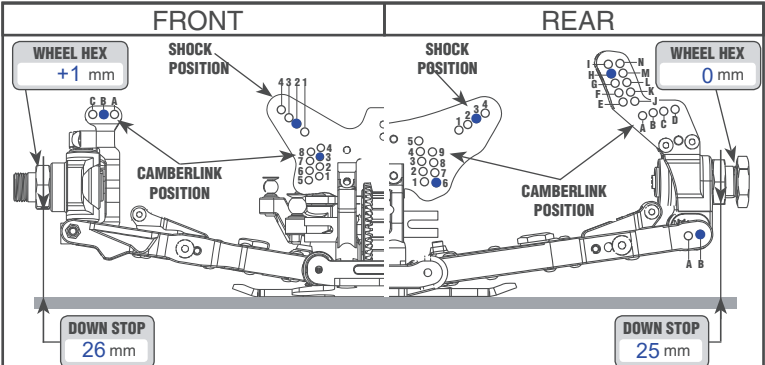


FRONT CAMBER L -2.5° R -2.5°	REAR CAMBER L -3° R -3°
------------------------------	-------------------------

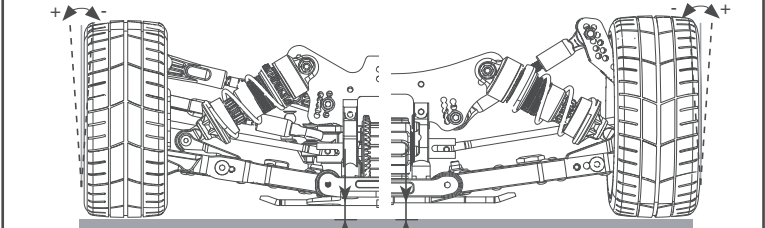


RIDE HEIGHT 9 mm	WITH TYRE Ø 98 mm	RIDE HEIGHT 9 mm	WITH TYRE Ø 98 mm
------------------	-------------------	------------------	-------------------

FRONT ARM SKIN		REAR ARM SKIN	
<input type="checkbox"/> TOP <input checked="" type="checkbox"/> NYLON <input type="checkbox"/> CARBON	<input type="checkbox"/> TOP <input checked="" type="checkbox"/> NYLON <input type="checkbox"/> CARBON	<input type="checkbox"/> BOTTOM <input checked="" type="checkbox"/> NYLON <input type="checkbox"/> CARBON	<input type="checkbox"/> BOTTOM <input checked="" type="checkbox"/> NYLON <input type="checkbox"/> CARBON

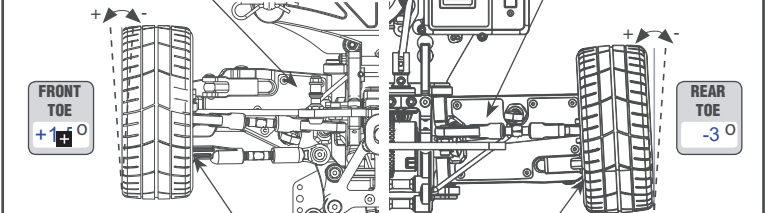

STEERING BLOCK ACKERMAN PLATE	OPTION TYPE 2
-------------------------------	---------------

CASTER INSERT		SERVO SAVER SPRING		REAR BRACE		WHEEL BASE	
<input type="checkbox"/> STD <input checked="" type="checkbox"/> HARD	<input type="checkbox"/> STD <input checked="" type="checkbox"/> HARD	<input checked="" type="checkbox"/> STOCK <input type="checkbox"/> ALU		<input type="checkbox"/> 0 <input checked="" type="checkbox"/> 1.25 <input type="checkbox"/> 2.5 <input type="checkbox"/> 3.75 <input type="checkbox"/> 5			

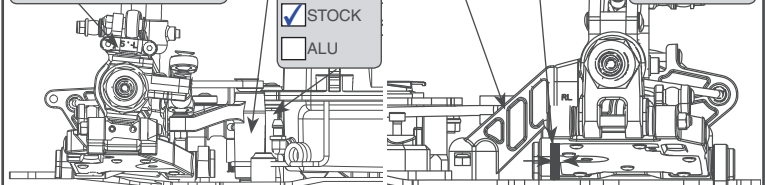

SUSPENSION BRACKETS INSERTS			
FRONT FR INSERTS N° 10	FRONT RR INSERTS N° 0	REAR FR INSERTS N° 1	REAR RR INSERTS N° 3

REMARKS